



**HL7 Implementation Guide for CDA Release 2
Questionnaire Response Document
(Danish profile – DK QRD)**

**Release 1.2
November 8th, 2017**

**Updated
May 6th 2021**

Revision history			
Release	Author	Date	Notes
1.0	MedCom, MDM	2015-05-19	Danish profile. Questionnaire Response Document
1.1	MedCom, MDM	2016-11-10	The use of references to external documents added. To provide better search facilities in this document all pictures showing xml-code examples changed to tables with real xml code.
1.1	MedCom, MDM	2016-11-13	URL reference added to Valid XDS Reference Types
1.2	MedCom, MDM	2017-11-08	To be consistent with XDS Metadata for Document Sharing, Danish profile, version 0.95 the following elements are added to the CDA header part of this document: documentationOf.serviceEvent.effectiveTime which shall contain the time interval used when a person answered the questionnaire. documentationOf.serviceEvent.code which shall contain the questionnaire type.
1.2	MedCom, MDM	2018-08-10	Changed documentationOf to InFulfillmentOf on page 21, bullet 16.
1.2	MedCom, MDM	2019-10-23	“Draft” removed
1.2	MedCom, MDM	2020-05-06	All errors found in https://svn.medcom.dk/svn/drafts/Standarder/HL7/PRO/PRO-infrastrukturen, diverse fund v2.xlsx has been corrected Description of Information Only sections added. Table of templateId’s added in Appendix B: Template Ids used in QRD “MedCom Prompt Table” replaced by “Some Table”
1.2	MedCom, MDM	2020-05-11	Missing mandatory id in organizer example added
1.2	MedCom, SGA	2021-05-06	Minor adjustment: <ul style="list-style-type: none"> - New layout and remove empty pages - In Multiple Choice Response Pattern Observation is the cardinality for selectedAnswerOptions corrected from [1..*] to [0..*] - Add missing internal document cross-reference - Add reference to Narrative Block guidance <ul style="list-style-type: none"> o QRD content and CDA content - Update list of examples <ul style="list-style-type: none"> o QRD content

TABLE OF CONTENTS

1	Introduction	7
1.1	Audience	7
1.2	Purpose	7
1.2.1	Typical Use Case	8
1.3	Scope	8
1.4	Approach	8
1.4.1	Keywords	9
1.4.2	Conformance Requirements	9
1.5	Organization of This Guide	9
1.6	Content of the Package	9
1.6.1	QRD content	9
1.6.2	CDA content	10
2	Questionnaire Response Document header template	11
2.1	Document Type Codes	11
2.2	Danish Profile Questionnaire Form Definition Document Header	11
2.2.1	RecordTarget	13
2.2.2	Author	14
2.2.3	DataEnterer	15
2.2.4	Informant	15
2.2.5	Custodian	16
2.2.6	InformationRecipient	16
2.2.7	LegalAuthenticator	17
2.2.8	Authenticator	17
2.2.9	Participant (Support)	17
2.2.10	InFulfillmentOf	18
2.2.11	DocumentationOf	18
2.3	Rendering Header Information for Human Presentation	19
3	Questionnaire Response document-level template	20
3.1	Questionnaire Response Document	20
4	section-level templates	21
4.1	Questionnaire Response Section	21
4.2	Information Only Section	22
5	Entry-level templates	24
5.1	Response Organizer	24
5.2	Response Media Pattern	26
5.3	Response Reference Range Pattern	27
5.4	Numeric Response Pattern Observation	28
5.5	Multiple Choice Response Pattern Observation	30
5.6	Text Response Pattern Observation	33
5.7	Analog Slider Response Pattern Observation	34

5.8	Discrete Slider Response Pattern Observation	36
5.9	External References	37
5.9.1	<i>External Document</i>	37
5.9.2	<i>External Observation</i>	38
6	Appendix A: Value sets	40
6.1	Valid XDS Reference Types	40
6.2	Valid Document Type Codes	40
7	Appendix B: Template Ids used in QRD	41

TABLE OF FIGURES

Figure 1: Typical Use Case	8
Figure 2: DK Realm Questionnaire Form Definition document header example	12
Figure 3: effectiveTime with time zone example	12
Figure 4: DK realm Questionnaire Response recordTarget example	13
Figure 5: Person author example	14
Figure 6: dataEnterer Example	15
Figure 7: Custodian example	16
Figure 8: informationRecipient example	17
Figure 9: Participant Example for a Supporting Person	18
Figure 10: DocumentationOf example of Period of time and QRD Type	19
Figure 11: Questionnaire Request Section example	22
Figure 12: Information Only Section example	23
Figure 13: Response Organizer Example	26
Figure 14: Response Media Pattern Example	27
Figure 15: Response Media Pattern Example with reference	27
Figure 16: Response Reference Range Pattern Example	28
Figure 17: Numeric Response Pattern Observation Example	30
Figure 18: Multiple Choice Response Pattern Observation Example 1	32
Figure 19: Multiple Choice Response Pattern Observation Example 2	32
Figure 20: Text Response Pattern Observation Example	34
Figure 21: Analog Slider Response Pattern Observation Example	35
Figure 22: Discrete Slider Response Pattern Observation Example	37

TABLE OF TABLES

Table 1: QRD Content of the Package	10
Table 2: CDA Content of the Package.....	10
Table 3: HL7 Basic Confidentiality Kind Value Set	11
Table 4: Language Value Set.....	12
Table 5: IND Role classCode Value Set	18
Table 6: Questionnaire Request Document Contexts	20
Table 7: Questionnaire Response Document Constraints Overview	20
Table 8: Questionnaire Response Section Pattern Contexts.....	21
Table 9: Questionnaire Request Section Constraint Overview	21
Table 10: Information Only Section Pattern Contexts.....	22
Table 11: Information Only Section Constraints Overview	22
Table 12: Response Organizer Contexts.....	24
Table 13: Response Organizer Constraints Overview	24
Table 14: Response Media Pattern Contexts	26
Table 15: Media Pattern Constraints Overview	26
Table 16: Response Reference Range Pattern Contexts	27
Table 17: Response Reference Pattern Constraints Overview.....	27
Table 18: Numeric Question Response Pattern Contexts	28
Table 19: Numeric Response Pattern Constraints Overview	29
Table 20: Multiple Choice Response Pattern Observation Contexts.....	30
Table 21: Multiple Choice Question Pattern Observation Constraints Overview	31
Table 22: Text Response Pattern Contexts.....	33
Table 23: Text Response Pattern Observation Constraints Overview.....	33
Table 24: Analog Slider Response Pattern Contexts	34
Table 25: Analog Slider Response Pattern Observation Constraints Overview	35
Table 26: Discrete Slider Response Pattern Contexts	36
Table 27: Discrete Slider Response Pattern Observation Constraints Overview	36
Table 28: External Document Pattern Overview	37
Table 29: External Observation Pattern Overview	38
Table 30: Template Ids used in QRD	41

1 INTRODUCTION

1.1 Audience

The audience for this document includes software developers and implementers of products and services that enable authoring, management, and administration of patient health questionnaires and their responses. This includes public and private disease management organizations as well as local, regional, and national health information exchange networks that wish to create and/or process Questionnaire Response documents (home monitoring and patient surveys) created according to this specification.

1.2 Purpose

This document is a Danish profile of the Clinical Document Architecture (CDA) Release 2, Questionnaire Response Document, Release 1.

The purpose of a Questionnaire Response document is to capture the health survey answers or answer sets to questions that have been administered to a patient. Questionnaire Response documents enable the capture of responses for surveying the patient's perceptions on their health and the impact that any treatments or adjustments to lifestyle have had on their quality of life. The Questionnaire Response documents may carry a variety of clinical and non-clinical responses in order to convey back to the healthcare organization the results of a patient questionnaire prescribed according to the Form Definition document¹. Authors of the Questionnaire Response documents may include the patients who are under the care of disease management organizations, primary care physicians, health and fitness coaches, chronic condition monitors, and post-acute and long-term care providers or their agents.

¹ HL7 Implementation Guide for CDA Release 2.0. Questionnaire Form Definition Document (Danish Profile – DK-QFDD). Release 1.1, September 28th 2016.

1.2.1 Typical Use Case

The primary use case for the Questionnaire Response document starts with the authoring of the survey based on the Form Definition document. It involves the Form Definition author, which may be a human or a device or software system acting on the behalf of a human. After creation of the Form Definition document, it is placed in a repository that is accessible by a disease management service. Subsequently, the disease management service will fetch the Questionnaire Form Definition document from the repository and send it to the application hosting device based on a prescribed order or schedule. The application hosting device will in turn signal to the patient that a new Form Definition document is available, and it will create a questionnaire specific for the particular patient.

The Questionnaire Response document is created as the patient fills out the questionnaire and is sent back to the disease monitoring station where it is ready for review by a human or computer monitor. Figure 1 shows the primary typical use case for the entire ecosystem.

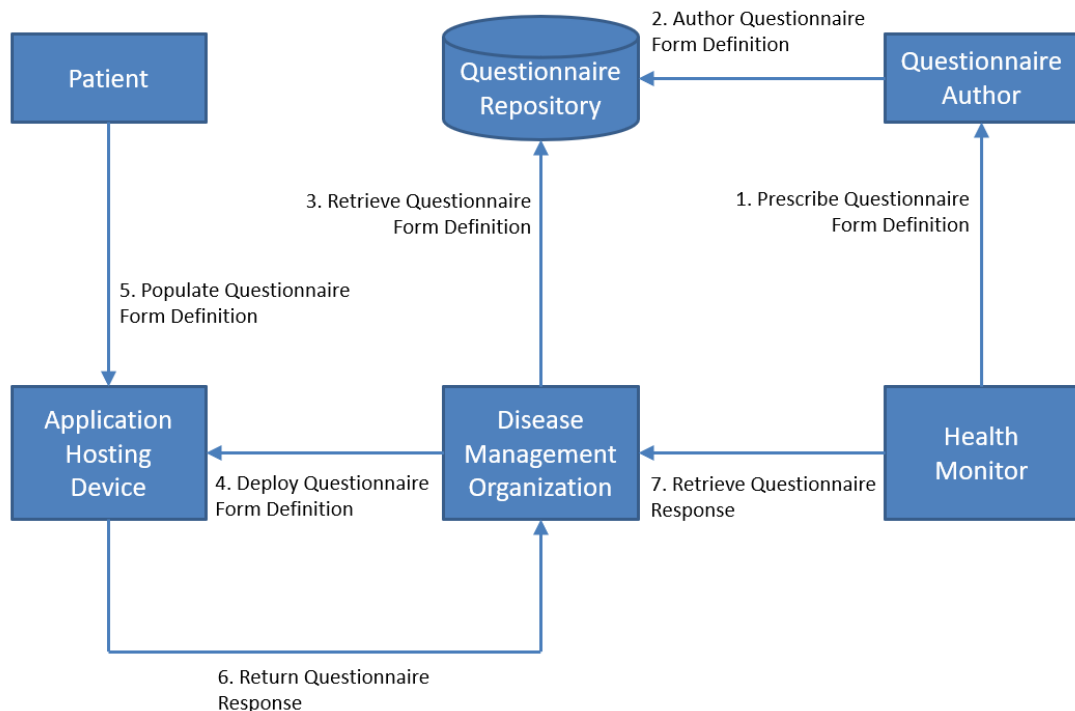


Figure 1: Typical Use Case

1.3 Scope

This implementation guide is a conformance profile, as described in the “Refinement and Localization”² section of the HL7 Version 3 Interoperability Standards. The base standard for this implementation guide is the HL7 Clinical Document Architecture, Release 2.0³. This implementation guide does not describe every aspect of the CDA. Rather, it defines constraints on the base CDA used in Questionnaire Response Document for the Danish profile.

1.4 Approach

Overall, the approach taken here is consistent with balloted implementation guides (IGs) for CDA. These publications view the ultimate implementation specification as a series of layered constraints. CDA itself is a set of constraints on the Health Level Seven (HL7) Reference Information Model (RIM). Implementation guides such as this document add constraints to CDA through conformance statements that further define and restrict the sequence and cardinality of CDA objects, and the vocabulary sets for coded elements.

² <http://www.hl7.org/v3ballot/html/infrastructure/conformance/conformance.htm>

³ HL7 Clinical Document Architecture (CDA Release 2). <http://www.hl7.org/implement/standards/cda.cfm>

1.4.1 Keywords

The keywords **SHALL**, **SHALL NOT**, **SHOULD**, **SHOULD NOT**, **MAY**, and **NEED NOT** in this document is to be interpreted as described in the HL7 Version 3 Publishing Facilitator's Guide:

- **SHALL**: an absolute requirement
- **SHALL NOT**: an absolute prohibition against inclusion
- **SHOULD/SHOULD NOT**: best practice or recommendation. There may be valid reasons to ignore an item, but the full implications must be understood and carefully weighed before choosing a different course
- **MAY/NEED NOT**: truly optional; can be included or omitted as the author decides with no implications

The keyword **SHALL** allow the use of nullFlavor unless the requirement is on an attribute or the use of nullFlavor is explicitly precluded.

1.4.2 Conformance Requirements

The constraints in the original Questionnaire Form Definition Document are carried on by using the original conformance identification identifier **CONF:XX**.

If an original constraint is not used in the Danish profile the number is omitted. In most cases new constraints in the Danish profile are added by using the conformance identification identifier **CONF-DK:XX**.

All conformance requirements are numbered sequentially.

1.5 Organization of This Guide

This guide includes a set of CDA Templates and prescribes their use within a Questionnaire Response CDA document. The main chapters are:

- **Chapter 2:** Questionnaire Response document Header Template describes constraints that apply to the header for all Universal Realm documents within the scope of this implementation guide.
- **Chapter 3:** Questionnaire Response Document-Level Template defines the document constraints that apply to Questionnaire Response Documents.
- **Chapter 4:** Section-Level Templates defines the section templates in Questionnaire Response Documents.
- **Chapter 5:** Entry-Level Templates defines the entry template in Questionnaire Response Documents.

1.6 Content of the Package

The following files comprise the package.

1.6.1 QRD content

Files are located here: <http://svn.medcom.dk/svn/releases/standarder/HL7/PRO/QRD>

Filename	Description	Standards Applicability
"Dokumentation" folder DK-QRD-v1.2.pdf	This implementation guide	Normative
"Dokumentation" folder DK-QFDD-v1.1.pdf	Specification for: <ul style="list-style-type: none">• Copy Right Section• Question Help Text Pattern Observation• Question Options Pattern Observation	Normative
"Dokumentation" folder NarrativeBlock_QRD_-_Implementation_Guidance-vX.X.pdf	A guidance to facilitate the development work of CDA narrative block	Informative
"Eksempler" folder QRD_Example_1.0_Numeric_Question.xml	The sample CDA XML file that includes examples of templates discussed in this guide: <ul style="list-style-type: none">• Example 1.0: Numeric Question	Informative

<p>QRD_Example_1.1_Numeric_Question_-_Graphics.xml</p> <p>QRD_Example_2.0_Multiple_Choice_Question.xml</p> <p>QRD_Example_2.1_Multiple_Choice_Question_-_Grouped.xml</p> <p>QRD_Example_3.0_Text_Question.xml</p> <p>QRD_Example_3.1.1_Text_Question_-_Associated_Text_Question.xml</p> <p>QRD_Example_3.1.2_Text_Question_-_Associated_Text_Question.xml</p> <p>QRD_Example_4.0_Analog_Slider_Question.xml</p> <p>QRD_Example_4.1_Analog_Slider_Question_-_Question_Feedback_Pattern_Observation.xml</p> <p>QRD_Example_5.0_Discrete_Slider_Question.xml</p>	<ul style="list-style-type: none"> • Example 1.1: Numeric Question (Graphics) • Example 2.0: Multiple Choice Question • Example 2.1: Multiple Choice Question (Grouped) • Example 3.0: Text Question • Example 3.1.1: Text Question (Associated Text Question) • Example 3.1.2: Text Question (Associated Text Question) • Example 4.0: Analog Slider Question • Example 4.1: Analog Slider Question (Question Feedback Pattern Observation) • Example 5.0: Discrete Slider Question 	
<p>“Schema” folder</p>	<p>Normative CDA R2 schema files to validate a Questionnaire Form Definition document instance.</p>	<p>Informative</p>

Table 1: QRD Content of the Package

1.6.2 CDA content

Filename and location	Description	Standards Applicability
<p>Narrative Block - Implementation Guidance.pdf</p> <p>http://svn.medcom.dk/svn/releases/Standarder/HL7/NarrativeBlock/</p>	<p>Implementation Guidance: Narrative Block Tag.</p>	<p>Informative</p>
<p>http://svn.medcom.dk/svn/drafts/Standarder/HL7/CDA-Stylesheet/HL7_CDA/HL7_CDA_stylesheet.xsl</p>	<p>Stylesheet for display of CDA instances</p>	<p>Informative</p>

Table 2: CDA Content of the Package

2 QUESTIONNAIRE RESPONSE DOCUMENT HEADER TEMPLATE

This template describes constraints that apply to the header within the scope of this implementation guide. Header constraints are described in the appropriate document-specific section below.

2.1 Document Type Codes

CDA R2 states that LOINC is the preferred vocabulary for document type codes. The document type code specifies the type of document being exchanged (e.g., History and Physical). The use of a single clinicalDocument/code is preferred for a CDA document template.

This Questionnaire Response Document is a Danish profile document, where LOINC is the preferred document code vocabulary.

2.2 Danish Profile Questionnaire Form Definition Document Header

[ClinicalDocument: templateId 1.2.208.184.13.1]

- SHALL** contain exactly one [1..1] realmCode (CONF:1).
 - This realmCode **SHOULD** be selected from HL7 ValueSet BindingRealm [2.16.840.1.113883.1.11.20355] from codesystem hl7Realm [2.16.840.1.113883.5.1124] **STATIC** 2010-11-11 (CONF:2).
- SHALL** contain exactly one [1..1] typeId (CONF:3).
 - This typeId **SHALL** contain exactly one [1..1] @root="2.16.840.1.113883.1.3" (CONF:4).
 - This typeId **SHALL** contain exactly one [1..1] @extension="POCD_HD000040" (CONF:5).
- SHALL** contain exactly one [1..1] header-level templateId (CONF-DK:1) such that it
 - This templateId **SHALL** contain exactly one [1..1] @root="1.2.208.184.13.1" (CONF-DK:2).
- SHALL** contain exactly one [1..1] id (CONF:9).
 - This id **SHALL** be a globally unique identifier for the document (CONF:10).
- SHALL** contain exactly one [1..1] code (CONF:11).
 - This code **SHALL** specify the Questionnaire Response Document generated by patient in response to a Questionnaire Form Definition document containing a specific measure (CONF-DK:2).
 - This code **SHALL** be a code from the LOINC Document Ontology which indicates a Questionnaire Response document containing responses to questions asked from the patient. (CONF-DK:3).
- SHALL** contain exactly one [1..1] title (CONF:14).
- SHALL** contain exactly one [1..1] effectiveTime (CONF:15).
- SHALL** contain exactly one [1..1] confidentialityCode, which **SHALL** be selected from ValueSet HL7 BasicConfidentialityKind 2.16.840.1.113883.1.11.16926 **STATIC** (CONF:16).
 - This code **SHALL** always be set to "N" (CONF-DK:4).
- SHALL** contain exactly one [1..1] languageCode, which **SHALL** be selected from ValueSet Language 2.16.840.1.113883.1.11.11526 **DYNAMIC** (CONF:17).

Value Set: HL7 DK Confidentiality codes Code System: 2.16.840.1.113883.5.25		
Code	Code System	Print name
N	Confidentiality Code	Normal
R	Confidentiality Code	Restricted
V	Confidentiality Code	Very Restricted

Table 3: HL7 Basic Confidentiality Kind Value Set

Value Set: Language		
Code System(s): Internet Society Language 2.16.840.1.113883.1.11.11526		
Descriptor	A value set of codes defined by Internet RFC 4646 (replacing RFC 3066). Please see ISO 639 language code set maintained by Library of Congress for enumeration of language codes http://www.ietf.org/rfc/rfc4646.txt	
Code	Code System	Print name
En	Internet Society Language	English
Fr	Internet Society Language	Frensh
Ar	Internet Society Language	Arabic
en_US	Internet Society Language	English, US
es-US	Internet Society Language	Spanish, US
...		

Table 4: Language Value Set

```
<?xml version="1.0" encoding="UTF-8"?>
<ClinicalDocument
  classCode="DOCCLIN"
  moodCode="EVN"
  xmlns="urn:hl7-org:v3"
  xmlns:sdtc="urn:hl7-org:sdtc"
  xmlns:voc="urn:hl7-org:v3/voc">
  <realmCode
    code="UV"/>
  <typeId
    extension="POCD_HD000040"
    root="2.16.840.1.113883.1.3"/>
  <!-- MedCom Danish QFDD-profile OID -->
  <templateId
    root="1.2.208.184.12.1"/>
  <!-- The next templateId, indicates constraints at the Questionnaere Form Definition
  Document-level -->
  <templateId
    root="1.2.208.184.12.1.1.1"/>
  <id
    assigningAuthorityName="Some Authority"
    extension="c8f1acf0-2e28-11e6-bdf4-0800200c9a66"
    root="1.2.208.1.1"/>
  <!-- This code is LOINC -->
  <code
    code="74468-0"
    codeSystem="2.16.840.1.113883.6.1"
    codeSystemName="LOINC"
    displayName="Form Definition Document"/>
  <title>KOL spørgeskema</title>
  <sdtc:statusCode
    code="new"/>
  <effectiveTime
    value="20160609123030+0200"/>
  <confidentialityCode
    code="N"
    codeSystem="2.16.840.1.113883.5.25"/>
  <languageCode
    code="da-DK"/>
```

Figure 2: DK Realm Questionnaire Form Definition document header example

```
<effectiveTime value="20161209123030+0100"/>
```

Figure 3: effectiveTime with time zone example

2.2.1 RecordTarget

The recordTarget records the patient whose health information (in the context of this IG, patient responses to a set of questions (or patient reported outcome measure) asked through the Questionnaire Form Definition Document) is described by the clinical document; each recordTarget must contain at least one patientRole element.

10. **SHALL** contain exactly one [1..1] recordTarget (CONF:18).
 - a. Such recordTargets **SHALL** contain exactly one [1..1] patientRole (CONF:19).
 - i. This patientRole **SHALL** contain exactly one [1..1] id (CONF-DK: 5).
 - ii. This patientRole **SHALL** contain exactly one [1..1] addr (CONF:21).
 - iii. This patientRole **SHALL** contain at least one [1..1] telecom (CONF:22).
 - iv. This patientRole **SHALL** contain exactly one [1..1] patient (CONF:23).
 1. This patient **SHALL** contain exactly one [1..1] name (CONF:24).
 2. This patient **SHALL** contain exactly one [1..1] administrativeGenderCode (CONF:25).
 3. This patient **SHALL** contain exactly one [1..1] birthTime (CONF:25).
 - a. **SHALL** be precise to year (CONF:27).
 - b. **SHALL** be precise to month (CONF-DK: 6).
 - c. **SHALL** be precise to day (CONF-DK: 7).
 - d. hhMMSS and offset from UTC **SHALL** be set to "000000+0000" (CONF-DK: 8).

```
<recordTarget
  contextControlCode="OP"
  typeCode="RCT">
  <patientRole
    classCode="PAT">
    <id
      assigningAuthorityName="CPR"
      extension="2512489996"
      root="1.2.208.176.1.2"/>
    <addr
      use="H">
      <streetAddressLine>Skovvejen 12</streetAddressLine>
      <streetAddressLine>Landet</streetAddressLine>
      <postalCode>5700</postalCode>
      <city>Svendborg</city>
      <country>Danmark</country>
    </addr>
    <telecom
      use="H"
      value="tel:65123456"/>
    <telecom
      use="WP"
      value="mailto:nab@udkantsdanmark.dk"/>
    <patient
      classCode="PSN"
      determinerCode="INSTANCE">
      <name>
        <given>Nancy</given>
        <given>Ann</given>
        <family>Berggren</family>
      </name>
      <administrativeGenderCode
        code="F"
        codeSystem="2.16.840.1.113883.5.1"
        codeSystemName="HL7"/>
      <birthTime
        value="19481225000000+0000"/>
    </patient>
  </patientRole>
</recordTarget>
```

Figure 4: DK realm Questionnaire Response recordTarget example

2.2.2 Author

The `author` element represents the creator of the clinical document. In the context of this IG (the Questionnaire Response Document), the author is usually the patient who answers questions.

11. **SHALL** contain at least one [1..*] `author` (CONF:29).
 - a. Such authors **SHALL** contain exactly one [1..1] `time` (CONF:30).
 - b. Such authors **SHALL** contain exactly one [1..1] `assignedAuthor` (CONF:31).
 - i. This `assignedAuthor` **SHALL** contain exactly one [1..1] `id` (CONF:32) such that it
 - ii. This `assignedAuthor` **SHALL** contain at least one [1..*] `addr` (CONF:36)
 - iii. This `assignedAuthor` **SHALL** contain at least one [1..*] `telecom` (CONF:37).
 - iv. There **SHALL** be exactly one `assignedAuthor/assignedPerson` (CONF-DK: 9).
 - v. This `assignedAuthor` **SHOULD** contain zero or one [0..1] `assignedPerson` (CONF:39).
 1. The `assignedPerson`, if present, **SHALL** contain at least one [1..*] `name` (CONF:40).
 - vi. If `assignedAuthor` has an associated `representedOrganization` and no `assignedPerson`, then the value for `"ClinicalDocument/author/assignedAuthor/id/@NullFlavor"` **SHALL** be "NA" "Not applicable" 2.16.840.1.113883.5.1008 NullFlavor **STATIC** (CONF-DK: 10).

```
<author
  contextControlCode="OP"
  typeCode="AUT">
  <time
    value="20150513134510+0100"/>
  <assignedAuthor
    classCode="ASSIGNED">
    <id
      assigningAuthorityName="CPR"
      extension="2512489996"
      root="1.2.208.176.1.2"/>
    <!-- The PAN IG includes conformance constraints on the code element.
         This author/assignedAuthor/code/@code must be a code from one of
         two value sets:
         PersonalRelationshipRoleType or ResponsibleParty. Both of these
         value sets include codes from the HL7 RoleCode Code System.-->
    <code
      code="SELF"
      codeSystem="2.16.840.1.113883.5.111"
      codeSystemName="HL7 Role code"
      displayName="Self"/>
    <addr
      use="H">
      <streetAddressLine>Skovvejen 12</streetAddressLine>
      <streetAddressLine>Landet</streetAddressLine>
      <postalCode>5700</postalCode>
      <city>Svendborg</city>
      <country>Danmark</country>
    </addr>
    <telecom
      use="H"
      value="tel:65123456"/>
    <telecom
      use="WP"
      value="mailto:nab@udkantsdanmark.dk"/>
    <assignedPerson
      classCode="PSN"
      determinerCode="INSTANCE">
      <name>
        <given>Nancy</given>
        <given>Ann</given>
        <family>Berggren</family>
      </name>
    </assignedPerson>
  </assignedAuthor>
</author>
```

Figure 5: Person author example

2.2.3 DataEnterer

The `dataEnterer` element represents the person who transferred the content, written or dictated by someone else, into the clinical document. The guiding rule of thumb is that an `author` provides the content found within the header or body of the document, subject to their own interpretation, and the `dataEnterer` adds that information to the electronic system. In other words, a `dataEnterer` transfers information from one source to another (e.g., transcription from paper form to electronic system).

12. **MAY** contain zero or one [0..1] `dataEnterer` (CONF:45).
 - a. Such `dataEnterer`, if present, **SHALL** contain exactly one [1..1] `assignedEntity` (CONF:46).
 - i. This `assignedEntity` **SHALL** contain exactly one [1..1] `id` (CONF:47)
 - ii. This `assignedEntity` **SHALL** contain exactly one [1..1] `addr` (CONF:48)
 - iii. This `assignedEntity` **SHALL** contain exactly one [1..1] `telecom` (CONF:49)
 - iv. This `assignedEntity` **SHALL** contain exactly one [1..1] `assignedPerson` (CONF:50)
 1. This `assignedPerson` **SHALL** contain exactly one [1..1] `name` (CONF:51)
 - v. This `assignedEntity` **MAY** contain zero or one [0..1] `code` to encode the relationship of the person to the `recordTarget` (CONF:52)

```
<dataEnterer
  typeCode="ENT">
  <assignedEntity
    classCode="ASSIGNED">
    <id
      assigningAuthorityName="CPR"
      extension="2512484996"
      root="1.2.208.176.1.2"/>
    <addr
      use="H">
      <streetAddressLine>Byvej 12</streetAddressLine>
      <streetAddressLine>Svinget</streetAddressLine>
      <postalCode>5000</postalCode>
      <city>Odense C</city>
      <country>Danmark</country>
    </addr>
    <telecom
      use="H"
      value="tel:65123456"/>
    <telecom
      use="WP"
      value="mailto:aeb@udkantsdanmark.dk"/>
    <assignedPerson
      classCode="PSN"
      determinerCode="INSTANCE">
      <name>
        <given>Adam</given>
        <given>Everyman</given>
        <family>Berggren</family>
      </name>
    </assignedPerson>
  </assignedEntity>
</dataEnterer>
```

Figure 6: `dataEnterer` Example

2.2.4 Informant

The `informant` element is not used in this profile.

2.2.5 Custodian

The `custodian` element represents the organization that is in charge of maintaining the document (e.g. a remote disease management organization (DMO)). The custodian is the steward that is entrusted with the use and management of the document. Every CDA document has exactly one custodian.

13. **SHALL** contain exactly one [1..1] `custodian` (CONF:60).
 - a. This `custodian` **SHALL** contain exactly one [1..1] `assignedCustodian` (CONF:61).
 - i. This `assignedCustodian` **SHALL** contain exactly one [1..1] `representedCustodianOrganization` which may be the person when the document is not maintained by an organization (CONF:62).
 1. This `representedCustodianOrganization` **SHALL** contain at least one [1..*] `id` (CONF:63).
 2. This `representedCustodianOrganization` **SHALL** contain exactly one [1..1] `name` (CONF:64).
 3. This `representedCustodianOrganization` **SHALL** contain exactly one [1..1] `telecom` (CONF:65).
 - a. This `telecom` **SHOULD** contain exactly one [1..1] `@use` (CONF:66).
 4. This `representedCustodianOrganization` **SHALL** contain exactly one [1..1] `addr` (CONF:67).

```
<custodian
  typeCode="CST">
  <assignedCustodian
    classCode="ASSIGNED">
    <representedCustodianOrganization
      classCode="ORG"
      determinerCode="INSTANCE">
      <id
        assigningAuthorityName="SOR"
        extension="368061000016003"
        root="1.2.208.176.1.1"/>
      <name>Aalborg Universitetshospital</name>
      <telecom
        use="WP"
        value="tel:97664800"/>
      <addr
        use="WP">
        <streetAddressLine>Lungemedicinsk afdeling</streetAddressLine>
        <streetAddressLine>Mølleparkvej 4</streetAddressLine>
        <postalCode>9000</postalCode>
        <city>Aalborg</city>
        <country>Danmark</country>
      </addr>
    </representedCustodianOrganization>
  </assignedCustodian>
</custodian>
```

Figure 7: Custodian example

2.2.6 InformationRecipient

The `informationRecipient` element records the intended recipient of the information at the time the document is created. For example, in cases where the intended recipient of the document is the patient's health chart, set the `receivedOrganization` to be the scoping organization for that chart.

14. **MAY** contain zero or more [0..*] `informationRecipient` (CONF:68).
 - a. The `informationRecipient` **SHALL** contain exactly one [1..1] `intendedRecipient` (CONF:69).
 - i. This `intendedRecipient` **SHOULD** contain at least one [1..*] `id` (CONF:70).
 - ii. This `intendedRecipient` **MAY** contain zero or one [0..1] `informationRecipient` (CONF:71).
 1. The `informationRecipient`, if present, **SHALL** contain at least one [1..1] `name` (CONF:72).
 - iii. This `intendedRecipient` **MAY** contain zero or one [0..1] `receivedOrganisation` (CONF:73).

1. The receivedOrganisation, if present, **SHALL** contain at least one [1..1] name (CONF:74).

```
<!-- Primary Care physician (PCP) as recipient -->
<informationRecipient
  typeCode="PRCP">
  <intendedRecipient
    classCode="ASSIGNED">
    <!-- The physician's number (Ydernummer). -->
    <id
      assigningAuthorityName="Region Midtjylland"
      extension="624799"
      root="1.2.208.176.1.4"/>
    <telecom
      use="WP"
      value="tel:99331800"/>
    <informationRecipient
      classCode="PSN"
      determinerCode="INSTANCE">
      <name>
        <prefix>Uddannelsesamanduensis</prefix>
        <given>Hans</given>
        <family>Jensen</family>
      </name>
    </informationRecipient>
    <receivedOrganization
      classCode="ORG"
      determinerCode="INSTANCE">
      <!-- Organization (SOR-ID) -->
      <id
        assigningAuthorityName="SOR"
        extension="478791000016005"
        root="1.2.208.176.1.1"/>
      <name>Lægerne Sløjfen</name>
      <telecom
        use="WP"
        value="tel:99331800"/>
      <addr
        use="WP">
        <streetAddressLine>Fyrkildevej 7, 1</streetAddressLine>
        <postalCode>9220</postalCode>
        <city>Aalborg Øst</city>
        <country>Danmark</country>
      </addr>
    </receivedOrganization>
  </intendedRecipient>
</informationRecipient>
```

Figure 8: informationRecipient example

2.2.7 LegalAuthenticator

The legalAuthenticator element is not used in this profile.

2.2.8 Authenticator

The authenticator element is not used in this profile.

2.2.9 Participant (Support)

The participant element identifies other supporting participants, including parents, relatives, caregivers and other participants related in some way to the patient.

A supporting person or organization is an individual or an organization with a relationship to the patient. A supporting person who is playing multiple roles would be recorded in multiple participants (e.g., emergency contact and next-of-kin)

15. **MAY** contain zero or more [0..*] participant (CONF:98).
 - a. The participant, if present, **MAY** contain zero or one [0..1] time (CONF:99).
 - b. Such participant (s), if present, **SHALL** have an associatedPerson or scopingOrganization element under participant/associatedEntity (CONF:100).

- c. Unless otherwise specified by the document specific header constraints, when participant/@typeCode is IND, associatedEntity/@classCode **SHALL** be selected from ValueSet 2.16.840.1.113883.11.20.9.33 INDRoleclassCodes **STATIC** 2011-09-30 (CONF:101).

Value Set: INDRoleclassCodes 2.16.840.1.113883.11.20.9.33 STATIC 2011-09-30		
Code System(s): RoleClass 2.16.840.1.113883.5.110		
Code	Code System	Print name
PRS	RoleClass	personal relationship
NOK	RoleClass	next of kin
CAREGIVER	RoleClass	Caregiver
AGNT	RoleClass	Agent
GUAR	RoleClass	Guarantor
ECON	RoleClass	emergency contact

Table 5: IND Role classCode Value Set

```

<participant
  typeCode="IND">
  <associatedEntity
    classCode="NOK">
    <addr
      use="H">
      <streetAddressLine>Vestergade 17</streetAddressLine>
      <postalCode>9220</postalCode>
      <city>Aalborg Øst</city>
      <country>Danmark</country>
    </addr>
    <telecom
      use="H"
      value="tel:23122312"/>
    <associatedPerson
      classCode="PSN">
      <name>
        <prefix>Forvalter</prefix>
        <given>Martha</given>
        <family>Berggren</family>
      </name>
    </associatedPerson>
  </associatedEntity>
</participant>

```

Figure 9: Participant Example for a Supporting Person

2.2.10 InFulfillmentOf

The `inFulfillmentOf` element represents orders that are fulfilled by this Questionnaire Response document. For example, in the Continua eco-system, a remote DMO creates a task for the patient to fill-in the Questionnaire which is represented according to the Questionnaire Form Definition Document Implementation Guide. Reference to such task is stored in the `id` field of the Questionnaire Response Document. Such ids may represent a globally unique identifier for the task object.

- 16. **MAY** contain zero or more [0..*] `inFulfillmentOf` (CONF:102).
 - a. The `inFulfillmentOf`, if present, **SHALL** contain exactly one [1..1] `order` (CONF:103).
 - i. This `order` **SHALL** contain at least one [1..*] `id` (CONF:104).

2.2.11 DocumentationOf

The `documentationOf` element is used to hold `eventCodeList` entries which are converted to metadata used to search for documents in the Danish XDS infrastructure. Further information on metadata in the document http://svn.medcom.dk/svn/drafts/Standarder/IHE/DK_profil_metadata/Metadata-v096.pdf

The necessary metadata is the period of time over which the questionnaire is answered and a code for the questionnaire type.

The first occurrence of `documentationOf` shall only contain the start and end time of the period over which the questionnaire was answered.

The second occurrence of documentationOf shall only contain the code of the questionnaire type.

17. **SHALL** contain exactly two [2..2] documentationOf (CONF-DK:21).
 - a. The first documentationOf **SHALL** contain exactly one [1..1] serviceEvent.
 - i. This serviceEvent **SHALL** contain exactly one [1.1] effectiveTime/low element such that it
 1. **SHALL** contain exactly one [1.1] @value holding the time when the person began answering the questionnaire (CONF-DK:22).
 - ii. This serviceEvent **SHALL** contain exactly one [1.1] effectiveTime/high element such that it
 1. **SHALL** contain exactly one [1.1] @value holding the time when the person completed the questionnaire. It is allowed to use an appropriate nullFlavor (CONF-DK:23).
 - b. The second documentationOf **SHALL** contain exactly one [1..1] serviceEvent.
 - i. This serviceEvent **SHALL** contain exactly one [1.1] code element such that it
 1. **SHALL** have exactly one [1.1] @code holding the questionnaire type code (CONF-DK:24)
 2. **SHALL** have exactly one [1.1] @codeSystem holding the OID of the questionnaire type code codesystem (CONF-DK:25)
 3. **SHALL** have exactly one [1.1] @displayName holding the description of the questionnaire type (CONF-DK:25)
 4. **SHALL** have exactly one [1.1] @codeSystemName holding the name of the questionnaire type code codesystem (CONF-DK:27)

```
<documentationOf
  typeCode="DOC">
  <serviceEvent
    classCode="MPROT"
    moodCode="EVN">
    <effectiveTime>
      <low
        value="20171108103010+0100"/>
      <high
        nullFlavor="NI"/>
    </effectiveTime>
  </serviceEvent>
</documentationOf>

<documentationOf
  typeCode="DOC">
  <serviceEvent
    classCode="MPROT"
    moodCode="EVN">
    <code
      code="KCCQ-12"
      codeSystem="1.2.208.999.9.9"
      codeSystemName="PRO Spørgeskematyper"
      displayName="Kansas City Cardiomyopathy Questionnaire"/>
  </serviceEvent>
</documentationOf>
```

Figure 10: DocumentationOf example of Period of time and QRD Type

2.3 Rendering Header Information for Human Presentation

Good practice would recommend that the following information to be present whenever the Questionnaire Response Document is viewed:

- Document title and document dates
- Names of all persons along with their roles, participations, participation date ranges, identifiers, address, and telecommunications information
- Names of selected organizations along with their roles, participations, participation date ranges, identifiers, address, and telecommunications information
- Date of birth for recordTarget

3 QUESTIONNAIRE RESPONSE DOCUMENT-LEVEL TEMPLATE

This chapter defines document-level template used in the Questionnaire Response Document containing set of question responses answered by the patient. Document-level templates describe the purpose and rules for constructing a conforming CDA document for its use case. Document templates include constraints on the CDA header and contain section-level templates which, in turn contain entry-level templates. Questionnaire Response Document template is a universal template, hence contains the minimum constraints. Base CDA constraints are not repeated if not further constrained.

For the patient generated Questionnaire Response Document, the header conforms to the DK Patient Generated Document Header template. For the clinicians generated responses in DK Realm, this Implementation Guide requires conformance to DK General Header template.

3.1 Questionnaire Response Document

[ClinicalDocument: templateId 1.2.208.184.13.1.1.1]

This template describes constraints that apply to the Questionnaire Response Document containing set of questions.

This document-level template contains the following information:

- Description and explanatory narrative
- Template metadata (e.g., templateId, etc.)
- Header constraints
- The required section-level template

Used By:	Contains Entries:
	Questionnaire Response Section Copy Right Section Information Only Section

Table 6: Questionnaire Request Document Contexts

Name	XPath	Card	Verb	Data Type	CONF#	Fixed Value
	ClinicalDocument[templateId/@root = '1.2.208.184.13.1.1.1']					
	templateId	1..1	SHALL			
	@root	1..1	SHALL			1.2.208.184.13.1.1.1
	Component	1..1	SHALL		CONF:114	
	structuredBody	1..1	SHALL		CONF:115	
	component	1..*	SHALL		CONF:116	
	Section	1..1	SHALL		CONF:117	

Table 7: Questionnaire Response Document Constraints Overview

1. **SHALL** conform to the Danish Profile Questionnaire Response Document Header template (templateId: 1.2.208.184.13) (CONF-DK: 11).
2. Patient generated Questionnaire Response Document in DK Realm **SHOULD** conform to the DK Realm Generated Document Header template (templateId: 1.2.208.184.13.1.1.1) (CONF-DK: 12).
3. **SHALL** contain exactly one [1..1] templateId (CONF:112) such that it
 - a. **SHALL** contain exactly one [1..1] @root="1.2.208.184.13.1.1.1" (CONF:113).
4. **SHALL** contain exactly one [1..1] component (CONF:114).
 - a. **SHALL** contain exactly one [1..1] structuredBody (CONF:115).
 - i. This structuredBody **SHALL** contain at least one [1..*] component (CONF:116) such that it
 1. **SHALL** contain exactly one [1..1] [Questionnaire Response Section](#) template (templateId: 2.16.840.1.113883.10.20.33.2.1) (CONF:117).
 2. **SHALL** contain exactly one [1..1] [Copy Right Section](#) template (templateId: 2.16.840.1.113883.10.20.32.2.2) (CONF:118).
 3. **SHALL** contain exactly one [1..1] [Information Only Section](#) template (templateId: 2.16.840.1.113883.10.20.33.2.1).

4 SECTION-LEVEL TEMPLATES

This section contains section-level templates used by the Questionnaire Response Document in this Implementation Guide. Section-level templates are always included in a document.

Each section-level template contains the following:

- Template metadata (e.g., templateId, etc.)
- Description
- Section code
- Section title
- Entry-level template names and Ids for referenced templates (required and optional)

4.1 Questionnaire Response Section

[section: templateId 2.16.840.1.113883.10.20.33.2.1]

A Questionnaire Response Document consists of sections that groups related question responses. Section title ease human-readability and navigation in the document. Section code help with the recipient's interpretation of a section. A section template defined by this implementation guide requires the use of at least one structured entry, which contains patient response to a question.

Used By:	Contains Entries:
Questionnaire Response document-level template (required)	Response Organizer

Table 8: Questionnaire Response Section Pattern Contexts

Name	XPath	Card	Verb	Data Type	CONF#	Fixed Value
	section[templateId/@root = '2.16.840.1.113883.10.20.33.2.1']					
	templateId	1..1	SHALL		CONF:119	
	@root	1..1	SHALL		CONF:120	2.16.840.1.113883.10.20.33.2.1
	code	1..1	SHALL		CONF:121	74465-6
	title	0..1	SHOULD		CONF:122	
	text	1..1	SHALL		CONF:123	
	languageCode	0..1	SHOULD		CONF:124	
	entry	1..*	SHALL		CONF:125	
	@typeCode	1..1	SHALL		CONF:126	DRIV
	organizer	1..1	SHALL		CONF:127	

Table 9: Questionnaire Request Section Constraint Overview

1. **SHALL** contain exactly one [1..1] `templateId` (CONF:119) such that it
 - a. **SHALL** contain exactly one [1..1] `@root="2.16.840.1.113883.10.20.33.2.1"` (CONF:120).
2. **SHALL** contain exactly one [1..1] `code` (CONF:121).
3. **SHOULD** contain zero or one [0..1] `title` (CONF:122).
4. **SHALL** contain exactly one [1..1] `text` (CONF:123).
 - a. See [Error! Reference source not found.](#)
5. **SHOULD** contain zero or one [0..1] `languageCode` which **SHALL** be selected from ValueSet `Language 2.16.840.1.113883.1.11.11526` **DYNAMIC** (CONF:124).
6. **SHALL** contain at least one [1..*] `entry` (CONF:125) such that it
 - a. **SHALL** contain exactly one [1..1] `@typeCode="DRIV"` (CONF:126)
 - b. **SHALL** contain exactly one [1..1] [Response Organizer](#) template (`templateId: 2.16.840.1.113883.10.20.33.4.1`) (CONF:127).

```

<section
  classCode="DOCSECT"
  moodCode="EVN">
  <templateId
    root="2.16.840.1.113883.10.20.33.2.1"/>
  <code
    code="74465-6"
    codeSystem="2.16.840.1.113883.6.1"
    codeSystemName="LOINC"/>
  <title>Spørgsmål 1</title>
  <text>Hvor mange gange om dagen...</text>
  <entry
    contextConductionInd="true"
    typeCode="DRIV">
    <organizer
      classCode="BATTERY"
      moodCode="EVN">
      ...
    </organizer>
  </entry>
</section>

```

Figure 11: Questionnaire Request Section example

4.2 Information Only Section

[section: templateId 2.16.840.1.113883.10.20.32.2.1 (OPEN)]

Information Only Sections has no entry element and are used to present information to the end-user.

Information Only Sections can be placed anywhere an ordinary section can be placed. In this QRD version it has the templatedId of the Questionnaire Form Definition Section (QFDD).

In the next QFDD version Information Only Sections will get its own unique templatedId, which will be used in the next version of QRD as well.

Used By:	Contains Entries:
Questionnaire Response document-level template (optional)	Information Only Section

Table 10: Information Only Section Pattern Contexts

Name	XPath	Card	Verb	Data Type	CONF#	Fixed Value
	section[templatedId/@root = '2.16.840.1.113883.10.20.32.2.1' (OPEN)]					
	templatedId	1..1	SHALL		CONF-DK:9	
	@root	1..1	SHALL		CONF-DK:10	2.16.840.1.113883.10.20.32.2.1 (OPEN)
	Title	0..1	SHOULD		CONF-DK:11	
	Text	1..1	SHALL		CONF-DK:12	
	languageCode	0..1	SHOULD		CONF-DK:13	

Table 11: Information Only Section Constraints Overview

- SHALL** contain exactly one [1..1] `templatedId` (CONF-DK:9) such that it
 - SHALL** contain exactly one [1..1] `@root="2.16.840.1.113883.10.20.32.2.1"` (CONF-DK:10).
- SHOULD** contain zero or one [0..1] `title` (CONF-DK:11).
- SHALL** contain exactly one [1..1] `text` (CONF-DK:12).
- SHOULD** contain zero or one [0..1] `languageCode` which **SHALL** be selected from ValueSet Language 2.16.840.1.113883.1.11.11526 **DYNAMIC** (CONF-DK:13).

```

<component
  contextConductionInd="true"
  typeCode="COMP">
  <section
    classCode="DOCSECT"
    moodCode="EVN">
    <!--templateID for Section-->
    <templateId
      root="2.16.840.1.113883.10.20.32.2.1"/>
    <title>Title, Information Only Section</title>
    <text>
      <paragraph>
        <content styleCode="Bold">
          OM DETTE EKSEMPEL:
        </content><br/>
        Dette eksempel viser brug af
        <content styleCode="Underline">
          INFO-SEKTION
        </content>.
      </paragraph>
    </text>
    <languageCode
      code="da-DK"/>
  </section>
</component>

```

Figure 12: Information Only Section example

5 ENTRY-LEVEL TEMPLATES

This part of the guide describes the clinical statement entry templates used within the sections of the Questionnaire Form Definition Document. Entry templates contain constraints that are required for conformance.

Each entry-level template description contains the following information:

- Key template metadata (e.g., templateId)
- Description and explanatory narrative.
- Required CDA acts, participants and vocabularies.
- Optional CDA acts, participants and vocabularies.

Entry-level templates also contain `id` element, which is an identifier for that entry. This `id` may be referenced within the document, or by the system receiving the document. The `id` assigned must be globally unique.

5.1 Response Organizer

[organizer: templateId 2.16.840.1.113883.10.20.33.4.1]

This template can be used to create groupings of other entries (or templates) that share a common context e.g. question responses related to a specific health domain or topic. The `organizer/@classCode` is equal to "BATTERY" and is used to group entries. The `organizer/code` could be used to indicate questions related to a specific health domain e.g. nutrition or mental status. The `sequenceNumber` is used to indicate the relative order of the `organizer/component` which contains question response represented by the generic observation class.

Used By:	Contains Entries:
Questionnaire Response Section (required)	Numeric Response Pattern Observation Multiple Choice Response Pattern Observation Text Response Pattern Observation Analog Slider Response Pattern Observation Discrete Slider Response Pattern Observation

Table 12: Response Organizer Contexts

Name	XPath	Card	Verb	Data Type	CONF#	Fixed Value
	organizer[templateId/@root = '2.16.840.1.113883.10.20.33.4.1']					
	@classCode	1..1	SHALL		CONF:128	2.16.840.1.113883.5.6 (HL7ActClass)=BATTERY
	@moodCode	1..1	SHALL		CONF:129	2.16.840.1.113883.5.1001 (ActMood = EVN
	templateId	1..1	SHALL		CONF:130	
	@root	1..1	SHALL		CONF:131	2.16.840.1.113883.10.20.33.4.1
	id	1..*	SHALL		CONF:132	
	code	0..1	SHOULD		CONF:133	
	statusCode	1..1	SHALL		CONF:134	
	@code	1..1	SHALL		CONF:135	2.16.840.1.113883.5.14 (ActStatus) = completed
	component	1..*	MAY		CONF:136	
	sequenceNumber	1..1	SHALL		CONF:137	
	observation	1..1	SHALL		CONF:138	

Table 13: Response Organizer Constraints Overview

1. **SHALL** contain exactly one [1..1] @classCode="BATTERY" (CodeSystem: HL7ActClass 2.16.840.1.113883.5.6 **STATIC**) (CONF:128).
2. **SHALL** contain exactly one [1..1] @moodCode="EVN" Event (CodeSystem: ActMood 2.16.840.1.113883.5.1001 **STATIC**) (CONF:129).
3. **SHALL** contain exactly one [1..1] templateId (CONF:130) such that it
 - a. **SHALL** contain exactly one [1..1] @root="2.16.840.1.113883.10.20.33.4.1" (CONF:131).
4. **SHALL** contain at least one [1..*] id (CONF:132).

5. **SHOULD** contain zero or one [0..1] code (CONF:133).
6. **SHALL** contain exactly one [1..1] statusCode (CONF:134).
 - a. This statusCode **SHALL** contain exactly one [1..1] @code="completed" (CodeSystem: ActStatus 2.16.840.1.113883.5.14) (CONF:135).
7. **SHALL** contain at least one [1..*] component (CONF:136) such that it
 - a. **SHALL** contain exactly one [1..1] sequenceNumber (CONF:137).
 - b. **SHALL** contain exactly one [1..1] of the following templates (CONF:138).
 - i. [Numeric Response Pattern Observation](#) template (templateId: 2.16.840.1.113883.10.20.33.4.4) (CONF:139).
 - ii. [Multiple Choice Response Pattern Observation](#) template (templateId: 2.16.840.1.113883.10.20.33.4.5) (CONF:140).
 - iii. [Text Response Pattern Observation](#) template (templateId: 2.16.840.1.113883.10.20.33.4.6) (CONF:141).
 - iv. [Analog Slider Response Pattern Observation](#) template (templateId: 2.16.840.1.113883.10.20.33.4.7) (CONF:142).
 - v. [Discrete Slider Response Pattern Observation](#) template (templateId: 2.16.840.1.113883.10.20.33.4.8) (CONF:143).

```

<organizer
  classCode="BATTERY"
  moodCode="EVN">
  <!-- Answers Organizer templateId -->
  <templateId
    root="2.16.840.1.113883.10.20.33.4.1"/>
  <id
    extension="7f6020a5-4b91-4e28-b3b7-c477b655403f"
    root="1.2.208.184"/>
  <statusCode
    code="completed"/>
  <!-- Contains response to numeric, multiple choice, text, analog or discrete slider question
  templates defined in the Questionnaire Form Definition Document IG -->
  <component
    contextConductionInd="true"
    typeCode="COMP">
    <sequenceNumber
      value="1"/>
    <!-- The following observation contains the response(s) -->
    <observation
      classCode="OBS"
      moodCode="EVN">
      <!--templateID for the Numeric Response Pattern-->
      <templateId
        root="2.16.840.1.113883.10.20.33.4.4"/>
      . . .
    </observation>
  </component>
  <component
    contextConductionInd="true"
    typeCode="COMP">
    <sequenceNumber
      value="2"/>
    <observation
      classCode="OBS"
      moodCode="EVN">
      <!--templateID for the Multiple Choice Response Pattern-->
      <templateId
        root="2.16.840.1.113883.10.20.33.4.5"/>
      . . .
    </observation>
  </component>
  <component
    contextConductionInd="true"
    typeCode="COMP">
    <sequenceNumber
      value="3"/>
    <observation
      classCode="OBS"
      moodCode="EVN">
      <!--templateID for the Text Response Pattern-->
      <templateId
        root="2.16.840.1.113883.10.20.33.4.6"/>
      . . .
  </observation>
  </component>
  </organizer>

```

```

</observation>
</component>
<component
  contextConductionInd="true"
  typeCode="COMP">
  <sequenceNumber
    value="4"/>
  <observation
    classCode="OBS"
    moodCode="EVN">
    <!--templateID for the Discrete Slider Response Pattern-->
    <templateId
      root="2.16.840.1.113883.10.20.33.4.8"/>
    . . .
  </observation>
</component>
</organizer>

```

Figure 13: Response Organizer Example

5.2 Response Media Pattern

[observationMedia: templateId 2.16.840.1.113883.10.20.33.4.2]

The Response Media Pattern is used to associate media with a response represented by one of the following templates:

- Numeric Response Pattern Observation
- Multiple Choice Response Pattern Observation
- Text Response Pattern Observation
- Analog Slider Response Observation
- Discrete Slider Response Pattern Observation

The media was part of the question presented to the user.

Used By:	Contains Entries:
Numeric Response Pattern Observation (optional) Multiple Choice Response Pattern Observation (optional) Text Response Pattern Observation (optional) Analog Slider Response Pattern Observation (optional) Discrete Slider Response Pattern Observation (optional)	

Table 14: Response Media Pattern Contexts

Name	XPath	Card	Verb	Data Type	CONF#	Fixed Value
	observationMedia[templateId/@root='2.16.840.1.113883.10.20.33.4.2']					
	@classCode	1..1	SHALL	CD	CONF:144	2.16.840.1.113883.5.6 (HL7ActClass)=OBS
	@moodCode	1..1	SHALL	CD	CONF:145	2.16.840.1.113883.5.1001 (ActMood) = EVN
	@ID	0..1	SHOULD			
	templateId	1..1	SHALL		CONF:146	
	@root	1..1	SHALL		CONF:147	2.16.840.1.113883.10.20.33.4.2
	Value	0..1	SHALL		CONF:148	

Table 15: Media Pattern Constraints Overview

1. **SHALL** contain exactly one [1..1] @classCode="OBS" (CodeSystem: HL7ActClass 2.16.840.1.113883.5.6 **STATIC**) (CONF:144).
2. **SHALL** contain exactly one [1..1] @moodCode="EVN" Event (CodeSystem: ActMood 2.16.840.1.113883.5.1001 **STATIC**) (CONF:145).
3. **SHOULD** contain exactly one [0..1] @ID
4. **SHALL** contain exactly one [1..1] templateId (CONF:146) such that it

- a. **SHALL** contain exactly one [1..1] @root="2.16.840.1.113883.10.20.33.4.2" (CONF:147).
5. **SHALL** contain exactly one [1..1] value (CONF:148).
6. **MAY** contain zero or more [0..*] reference elements as described in [5.9 External References](#)

```
<observationMedia
  ID="example.png"
  classCode="OBS"
  moodCode="DEF">
  <templateId
    root="2.16.840.1.113883.10.20.33.4.2"/>
  <value
    mediaType="image/png"
    representation="B64">
    <!-- base64 encoded image -->
  </value>
</observationMedia>
```

Figure 14: Response Media Pattern Example

```
<observationMedia
  classCode="OBS"
  moodCode="EVN">
  <templateId
    root="2.16.840.1.113883.10.20.33.4.2"/>
  <value
    mediaType="image/jpeg">
    <reference
      value="example"/>
  </value>
</observationMedia>
```

Figure 15: Response Media Pattern Example with reference

5.3 Response Reference Range Pattern

[criterion: templateId 2.16.840.1.113883.10.20.33.4.3]

The Response Reference Range Pattern is used to hold lower and upper boundaries for the question response in the context of this implementation guide. For example, in case of Figure 16, the value entered should be of the type 'INT' between '0' and '24'.

Used By:	Contains Entries:
Numeric Response Pattern Observation (optional)	

Table 16: Response Reference Range Pattern Contexts

Name	XPath	Card	Verb	Data Type	CONF#	Fixed Value
	referenceRange[templateId/@root='2.16.840.1.113883.10.20.33.4.3']					
	@typeCode	1..1	SHALL	CD	CONF:149	REFV
	templateId	1..1	SHALL		CONF:150	
	@root	1..1	SHALL		CONF:151	2.16.840.1.113883.10.20.33.4.3
	observationRange	1..1	SHALL		CONF:152	
	text	0..1	MAY		CONF:153	
	value	1..1	SHALL		CONF:154	
	@xsi:type	1..1	SHALL		CONF:155	
minimumValue	low	1..1	SHALL		CONF:156	
maximumValue	high	1..1	SHALL		CONF:157	

Table 17: Response Reference Pattern Constraints Overview

1. **SHALL** contain exactly one [1..1] @typeCode="REFV" (CodeSystem: HL7ActRelationshipType 2.16.840.1.113883.5.1002) (CONF:149).
2. **SHALL** contain exactly one [1..1] templateId (CONF:150) such that it
 - a. **SHALL** contain exactly one [1..1] @root="2.16.840.1.113883.10.20.33.4.3" (CONF:151).

3. The referenceRange SHALL contain exactly one [1..1] observationRange (CONF:152).
 - a. MAY contain zero or one [0..1] text (CONF:153).
 - b. SHALL contain exactly one [1..1] value (CONF:116) such that it
 - i. SHALL contain exactly one [1..1] @xsi:type (CONF:155).
 - ii. SHALL contain exactly one [1..1] low (CONF:156).
 - iii. SHALL contain exactly one [1..1] high (CONF:157).

```

<referenceRange
  typeCode="REFV">
  <!--templateID for the Response Reference Range Pattern-->
  <templateId
    root="2.16.840.1.113883.10.20.33.4.3"/>
  <observationRange>
    <value
      xsi:type="IVL_INT">
      <low
        value="0"/>
      <high
        value="24"/>
      </value>
    </observationRange>
  </referenceRange>

```

Figure 16: Response Reference Range Pattern Example

5.4 Numeric Response Pattern Observation

[precondition: templateId 2.16.840.1.113883.10.20.33.4.4]

The Numeric Response Pattern Observation is used to construct the question instance where the expected response is a number of the following data types

1. INT
2. REAL
3. TS

Response Reference Range Pattern template may also be associated with this pattern indicating the expected range of observation/value (i.e. answer to the question).

Used By:	Contains Entries:
Response Organizer (required)	Response Media Pattern
Analog Slider Response Pattern Observation (required)	Response Reference Range Pattern
	Question Help Text Pattern Observation

Table 18: Numeric Question Response Pattern Contexts

Name	XPath	Card	Verb	Data Type	CONF#	Fixed Value
	observation[templateId/@root = '2.16.840.1.113883.10.20.33.4.4']					
	@classCode	1..1	SHALL		CONF:158	2.16.840.1.113883.5.6 (HL7ActClass) = OBS
	@moodCode	1..1	SHALL		CONF:159	2.16.840.1.113883.5.1001 (ActMood) = EVN
	templateId	1..1	SHALL		CONF:160	
	@root	1..1	SHALL		CONF:161	2.16.840.1.113883.10.20.33.4.4
questionId	id	1..*	SHALL		CONF:161	
question	code	1..1	SHALL	CE	CONF:163	
	@code	1..1	SHALL		CONF:164	
	@codeSystem	1..1	SHALL		CONF:165	
	originalText	1..1	SHALL		CONF:166	
	languageCode	0..1	SHOULD		CONF:167	
	statusCode	1..1	SHALL		CONF:168	
	@code	1..1	SHALL		CONF:169	2.16.840.1.113883.5.14 (ActStatus) = completed
answerNumeric	value	1..1	SHALL		CONF:170	
	@xsi:type	1..1	SHALL		CONF:171	INT, REAL or TS

	entryRelationship	0..1	MAY		CONF:172	
	@typeCode	1..1	SHALL	CD	CONF:173	SUBJ
	observation	1..1	SHALL		CONF:174	
	entryRelationship	0..1	SHOULD		CONF:175	
	@typeCode	1..1	SHALL	CD	CONF:176	REFR
associatedMedia	observationMedia	1..1	SHALL		CONF:177	
	referenceRange	0..*	SHOULD		CONF:178	

Table 19: Numeric Response Pattern Constraints Overview

1. **SHALL** contain exactly one [1..1] @classCode="OBS" (CodeSystem: HL7ActClass 2.16.840.1.113883.5.6 **STATIC**) (CONF:158).
2. **SHALL** contain exactly one [1..1] @moodCode="EVN" (CodeSystem: ActMood 2.16.840.1.113883.5.1001 **STATIC**) (CONF:159).
3. **SHALL** contain exactly one [1..1] templateId (CONF:160) such that it
 - a. **SHALL** contain exactly one [1..1] @root="2.16.840.1.113883.10.20.33.4.4" (CONF:161).
4. **SHALL** contain at least one [1..*] id (CONF:162).
5. **SHALL** contain exactly one [1..1] code (CONF:163).
 - a. This code **SHALL** contain exactly one [1..1] @code (CONF:164).
 - b. This code **SHALL** contain exactly one [1..1] @codeSystem (CONF:165).
 - c. This code **SHALL** contain exactly one [1..1] originalText (CONF:166).
6. **SHOULD** contain zero or one [0..1] languageCode which **SHALL** be selected from ValueSet Language 2.16.840.1.113883.1.11.11526 **DYNAMIC** (CONF:167).
7. **SHALL** contain exactly one [1..1] statusCode (CONF:168).
 - a. This statusCode **SHALL** contain exactly one [1..1] @code="completed" (CodeSystem: ActStatus 2.16.840.1.113883.5.14) (CONF:169).
8. **SHALL** contain exactly one [1..1] value (CONF:170)
 - a. **SHALL** contain exactly one [1..1] @xsi:type, where the value of @xsi:type could be "INT", "REAL" or "TS" (CONF:171).
9. **MAY** contain zero or one [0..1] entryRelationship (CONF:172).
 - a. The entryRelationship, if present, **SHALL** contain exactly one [1..1] @typeCode="SUBJ" (CodeSystem: HL7ActRelationshipType 2.16.840.1.113883.5.1002) (CONF:173).
 - b. **SHALL** contain exactly one [1..1] [Question Help Text](#) Pattern Observation template (templateId 2.16.840.1.113883.10.20.32.4.19) (CONF:174).
10. **SHOULD** contain zero or one [0..1] entryRelationship (CONF:175).
 - a. The entryRelationship, if present, **SHALL** contain exactly one [1..1] @typeCode="REFR" (CodeSystem: HL7ActRelationshipType 2.16.840.1.113883.5.1002) (CONF:176).
 - b. **SHALL** conform to the [Response Media Pattern](#) template (templateId 2.16.840.1.113883.10.20.33.4.2) (CONF:177)
11. **SHOULD** contain zero or more [0..*] [Response Reference Range Pattern](#) template (templateId 2.16.840.1.113883.10.20.33.4.3) (CONF:178).

```

<observation
  classCode="OBS"
  moodCode="EVN">
  <!--templateID for the Numeric Response Pattern-->
  <templateId
    root="2.16.840.1.113883.10.20.33.4.4"/>
  <id
    extension="b0e99a2a-2c3a-4f0f-a7eb-5287bbd0174d"
    root="1.2.208.184"/>
  <code
    code="q4768"
    codeSystem="1.2.208.N.N.N"
    codeSystemName="Some Table">
    <originalText>Hvor mange timer sov du sidste nat?</originalText>
  </code>
  <value
    value="7"
    xsi:type="INT"/>
  <referenceRange

```

```

typeCode="REFV">
<!--templateID for the Response Reference Range Pattern-->
<templateId
  root="2.16.840.1.113883.10.20.33.4.3"/>
<observationRange>
  <value
    xsi:type="IVL_INT">
    <low
      value="0"/>
    <high
      value="24"/>
    </value>
  </observationRange>
</referenceRange>
</observation>

```

Figure 17: Numeric Response Pattern Observation Example

5.5 Multiple Choice Response Pattern Observation

[observation: templateId 2.16.840.1.113883.10.20.33.4.5]

The Multiple Choice Response Pattern Observation is used to hold response from a multiple choice question where a user can select multiple options. Question Options Pattern Observation template may be also be associated with this pattern indicating the minimum and maximum number of options that should have been selected by a user.

Used By:	Contains Entries:
Response Organizer (required) Discrete Slider Response Pattern Observation (required)	Response Media Pattern Response Reference Range Pattern Question Help Text Pattern Observation Question Options Pattern Observation Text Response Pattern Observation

Table 20: Multiple Choice Response Pattern Observation Contexts

Name	XPath	Card	Verb	Data Type	CONF#	Fixed Value
	observation[templateId/@root = '2.16.840.1.113883.10.20.33.4.5']					
	@classCode	1..1	SHALL		CONF:179	2.16.840.1.113883.5.6 (HL7ActClass) = OBS
	@moodCode	1..1	SHALL		CONF:180	2.16.840.1.113883.5.1001 (ActMood) = EVN
	templateId	1..1	SHALL		CONF:181	
	@root	1..1	SHALL		CONF:182	2.16.840.1.113883.10.20.33.4.5
questionId	id	1..*	SHALL	CE	CONF:183	
question	code	1..1	SHALL	CE	CONF:184	
	@code	1..1	SHALL		CONF:185	
	@codeSystem	1..1	SHALL		CONF:186	
	originalText	1..1	SHALL		CONF:187	
	languageCode	0..1	SHOULD		CONF:188	
	statusCode	1..1	SHALL		CONF:189	
	@code	1..1	SHALL		CONF:190	2.16.840.1.113883.5.14 (ActStatus) = completed
selectedAnswerOptions	value	0..*	SHOULD		CONF:191	
	@xsi:type	1..1	SHALL		CONF:192	CE
	@code	1..1	SHALL		CONF:193	
	@codeSystem	1..1	SHALL		CONF:194	
	@displayName	1..1	SHALL		CONF:195	
	entryRelationship	0..*	SHOULD		CONF:196	
	@typeCode	1..1	SHALL	CD	CONF:197	SUBJ
helpText or questionOptions	observation	1..1	SHALL		CONF:198	
	entryRelationship	0..1	SHOULD		CONF:200	
	@typeCode	1..1	SHALL	CD	CONF:201	REFR

associatedMedia	observationMedia	1..1	SHALL		CONF:202	
associatedTextResponse	observation	1..1	SHALL		CONF:203	

Table 21: Multiple Choice Question Pattern Observation Constraints Overview

1. **SHALL** contain exactly one [1..1] @classCode="OBS" (CodeSystem: HL7ActClass 2.16.840.1.113883.5.6 **STATIC**) (CONF:179).
2. **SHALL** contain exactly one [1..1] @moodCode="EVN" (CodeSystem: ActMood 2.16.840.1.113883.5.1001 **STATIC**) (CONF:180).
3. **SHALL** contain exactly one [1..1] templateId (CONF:181) such that it
 - a. **SHALL** contain exactly one [1..1] @root="2.16.840.1.113883.10.20.33.4.5" (CONF:182).
4. **SHALL** contain at least one [1..*] id (CONF:183).
5. **SHALL** contain exactly one [1..1] code (CONF:184).
 - a. This code **SHALL** contain exactly one [1..1] @code (CONF:185).
 - b. This code **SHALL** contain exactly one [1..1] @CodeSystem (CONF:186).
 - c. This code **SHALL** contain exactly one [1..1] originalText (CONF:187).
6. **SHOULD** contain zero or one [0..1] languageCode which **SHALL** be selected from ValueSet Language 2.16.840.1.113883.1.11.11526 **DYNAMIC** (CONF:188).
7. **SHALL** contain exactly one [1..1] statusCode (CONF:189).
 - a. This statusCode **SHALL** contain exactly one [1..1] @code="completed" (CodeSystem: ActStatus 2.16.840.1.113883.5.14) (CONF:190).
8. **SHOULD** contain zero or many [0..*] value (CONF:191).
 - a. **SHALL** contain exactly one [1..1] @xsi:type="CE" (CONF:192).
 - b. **SHALL** contain exactly one [1..1] @code (CONF:193).
 - c. **SHALL** contain exactly one [1..1] @CodeSystem (CONF:194).
 - d. **SHALL** contain exactly one [1..1] @displayName (CONF:195).
9. **SHOULD** contain zero or many [0..*] entryRelationship (CONF:196) such that it
 - a. **SHALL** contain exactly one [1..1] @typeCode="SUBJ" (CodeSystem: HL7ActRelationshipType 2.16.840.1.113883.5.1002) (CONF:197).
 - b. **SHALL** contain exactly one [1..1] [Question Help Text Pattern Observation](#) (CONF:198).
 - c. **SHALL** contain exactly one [1..1] [Question Options Pattern Observation](#) (CONF:199).
10. **SHOULD** contain zero or one [0..1] entryRelationship (CONF:200).
 - a. The entryRelationship, if present, **SHALL** contain exactly one [1..1] @typeCode="REFR" (CodeSystem: HL7ActRelationshipType 2.16.840.1.113883.5.1002) (CONF:201).
 - b. **SHALL** contain exactly one [1..1] [Response Media Pattern](#) template (templateId: 2.16.840.1.113883.10.20.33.4.2) (CONF:202).
 - c. **SHALL** contain exactly one [1..1] [Text Response Pattern Observation](#) template (templateId: 2.16.840.1.113883.10.20.33.4.6) (CONF:203).

```

<observation
  classCode="OBS"
  moodCode="EVN">
  <!--templateID for the Multiple Choice Response Pattern-->
  <templateId
    root="2.16.840.1.113883.10.20.33.4.5"/>
  <id
    extension="23b8ba08-3825-4bfd-a87a-fb91f76b03fe"
    root="1.2.208.184"/>
  <code
    code="q11-451"
    codeSystem="1.2.208.N.N.N"
    codeSystemName="Some Table"
    displayName="Behov for konsultation">
  <originalText>Hvad er dit behov i forhold til en konsultation?</originalText>
  </code>
  <value
    code="A11-451.3"
    codeSystem="1.2.208.N.N.N"
    codeSystemName="Some Table"
    displayName="Jeg vil gerne have en tid i ambulatoriet"
  </value>
  </observation>

```

```

xsi:type="CE"/>
<entryRelationship
typeCode="SUBJ">
<observation
classCode="OBS"
moodCode="EVN">
<!--templateID for the Question Options Pattern Observation-->
<templateId
root="2.16.840.1.113883.10.20.32.4.20"/>
<code
code="74467-2"
codeSystem="2.16.840.1.113883.6.1"/>
<value
xsi:type="IVL_INT">
<!--minimum options-->
<low
value="1"/>
<!--maximum options-->
<high
value="1"/>
</value>
</observation>
</entryRelationship>
</observation>

```

Figure 18: Multiple Choice Response Pattern Observation Example 1

```

<observation
classCode="OBS"
moodCode="EVN">
<!--templateID for the Multiple Choice Response Pattern-->
<templateId
root="2.16.840.1.113883.10.20.33.4.5"/>
<id
extension="f64972ee-7f50-4d63-b324-e2e0ffd591eb"
root="1.2.208.184"/>
<code
code="q11-454"
codeSystem="1.2.208.N.N.N"
codeSystemName="Some Table"
displayName="Årsag høj puls">
<originalText>Venligst vælg nogle årsager (højst 4) til din høje puls</originalText>
</code>
<value
code="A11-454.2"
codeSystem="1.2.208.N.N.N"
codeSystemName="Some Table"
displayName="Jeg havde en meget stresset dag på arbejdet"
xsi:type="CE"/>
<value
code="A11-454.4"
codeSystem="1.2.208.N.N.N"
codeSystemName="Some Table"
displayName="Jeg glemte at tage min medicin om morgenen"
xsi:type="CE"/>
<entryRelationship
typeCode="SUBJ">
<observation
classCode="OBS"
moodCode="EVN">
<!--templateID for the Question Options Pattern Observation-->
<templateId
root="2.16.840.1.113883.10.20.32.4.20"/>
<code
code="74467-2"
codeSystem="2.16.840.1.113883.6.1"/>
<value
xsi:type="IVL_INT">
<!--minimum options-->
<low
value="1"/>
<!--maximum options-->
<high
value="4"/>
</value>
</observation>
</entryRelationship>
</observation>

```

Figure 19: Multiple Choice Response Pattern Observation Example 2

5.6 Text Response Pattern Observation

[observation: templateId 2.16.840.1.113883.10.20.33.4.6]

The Text Question Pattern Observation is used to hold response from a text question where the expected answer is free text.

Used By:	Contains Entries:
Response Organizer (required)	Response Media Pattern Question Help Text Pattern Observation

Table 22: Text Response Pattern Contexts

Name	XPath	Card	Verb	Data Type	CONF#	Fixed Value
	observation[templateId/@root = '2.16.840.1.113883.10.20.33.4.6']					
	@classCode	1..1	SHALL		CONF:204	2.16.840.1.113883.5.6 (HL7ActClass) = OBS
	@moodCode	1..1	SHALL		CONF:205	2.16.840.1.113883.5.1001 (ActMood) = EVN
	templateId	1..1	SHALL		CONF:206	
	@root	1..1	SHALL		CONF:207	2.16.840.1.113883.10.20.33.4.6
questionId	id	1..*	SHALL		CONF:208	
question	code	1..1	SHALL	CE	CONF:209	
	@code	1..1	SHALL		CONF:210	
	@codeSystem	1..1	SHALL		CONF:211	
	originalText	1..1	SHALL		CONF:212	
	languageCode	0..1	SHOULD		CONF:213	
	statusCode	1..1	SHALL		CONF:214	
	@code	1..1	SHALL		CONF:215	2.16.840.1.113883.5.14 (ActStatus)=completed
	value	1..1	SHALL		CONF:216	
	@xsi:type	1..1	SHALL		CONF:217	ST
	entryRelationship	0..1	MAY		CONF:218	
	@typeCode	1..1	SHALL	CD	CONF:219	SUBJ
helpText	observation	1..1	SHALL		CONF:220	
	entryRelationship	0..1	SHOULD		CONF:221	
	@typeCode	1..1	SHALL	CD	CONF:222	REFR
associatedMedia	observationMedia	1..1	SHALL		CONF:223	

Table 23: Text Response Pattern Observation Constraints Overview

- SHALL** contain exactly one [1..1] @classCode="OBS" (CodeSystem: HL7ActClass 2.16.840.1.113883.5.6 **STATIC**) (CONF:204).
- SHALL** contain exactly one [1..1] @moodCode="EVN" (CodeSystem: ActMood 2.16.840.1.113883.5.1001 **STATIC**) (CONF:205).
- SHALL** contain exactly one [1..1] **templateId** (CONF:206) such that it
 - SHALL** contain exactly one [1..1] @root="2.16.840.1.113883.10.20.33.4.6" (CONF:207).
- SHALL** contain at least one [1..*] id (CONF:208).
- SHALL** contain exactly one [1..1] code (CONF:209).
 - This code **SHALL** contain exactly one [1..1] @code (CONF:210).
 - This code **SHALL** contain exactly one [1..1] @codeSystem (CONF:211).
 - This code **SHALL** contain exactly one [1..1] @originalText (CONF:212).
- SHOULD** contain zero or one [0..1] **languageCode** which **SHALL** be selected from ValueSet Language 2.16.840.1.113883.1.11.11526 **DYNAMIC** (CONF:213).
- SHALL** contain exactly one [1..1] statusCode (CONF:214).
 - This statusCode **SHALL** contain exactly one [1..1] @code="completed" (CodeSystem: ActStatus 2.16.840.1.113883.5.14) (CONF:215).
- SHALL** contain exactly one [1..1] value (CONF:216).
 - SHALL** contain exactly one [1..1] @xsi:type="ST" (CONF:217).
- MAY** contain zero or one [0..1] entryRelationship (CONF:218).

- a. The entryRelationship, if present, **SHALL** contain exactly one [1..1] @typeCode="SUBJ" (CodeSystem: HL7ActRelationshipType 2.16.840.1.113883.5.1002) (CONF:219).
 - b. **SHALL** contain exactly one [1..1] [Question Help Text Pattern Observation](#) template (templateId 2.16.840.1.113883.10.20.32.4.19) (CONF:220).
10. **SHOULD** contain zero or one [0..1] entryRelationship (CONF:221).
- a. The entryRelationship, if present, **SHALL** contain exactly one [1..1] @typeCode="REFR" (CodeSystem: HL7ActRelationshipType 2.16.840.1.113883.5.1002) (CONF:222).
 - b. **SHALL** conform to the [Response Media Pattern](#) template (templateId 2.16.840.1.113883.10.20.33.4.2) (CONF:223).

```

<observation
  classCode="OBS"
  moodCode="EVN">
  <!--templateID for the Text Response Pattern-->
  <templateId
    root="2.16.840.1.113883.10.20.33.4.6"/>
  <id
    extension="4687c8a0-a84b-4237-9fdc-ddb8e351bc41"
    root="1.2.208.184"/>
  <code
    code="q1"
    codeSystem="1.2.208.N.N.N"
    codeSystemName=" Some Table "
    displayName=" Problemer ifm. Epilepsi">
    <originalText>Medfører din epilepsi (anfald/behandling) alvorlige begrænsninger for dig? (fx sociale begrænsninger)</originalText>
  </code>
  <value
    xsi:type="ST">Ja, jeg må ikke køre bil længere og kan ikke bare tage en bus, fordi jeg er bange for at få nye anfald.</value>
</observation>

```

Figure 20: Text Response Pattern Observation Example

5.7 Analog Slider Response Pattern Observation

[observation: templateId 2.16.840.1.113883.10.20.33.4.7]

The Analog Slider Response Pattern is used to hold response to a Visual Analog Slider Question that models a visual analogue scale (VAS)⁴ [5]. The continuum range is indicated by the referenceRange/observationRange construct where the data type of the value/@xsi:type="GLIST_PQ". The head (or starting point) of the scale is indicated by value/head, the step size is indicated by value/increment and the tail (or the end) of the scale is indicated by value/denominator.

Used By:	Contains Entries:
Response Organizer (required)	Numeric Response Pattern Observation

Table 24: Analog Slider Response Pattern Contexts

Name	XPath	Card	Verb	Data Type	CONF#	Fixed Value
	observation[templateId/@root = '2.16.840.1.113883.10.20.33.4.7']					
	templateId	1..1	SHALL		CONF:224	
	@root	1..1	SHALL		CONF:224A	2.16.840.1.113883.10.20.33.4.4
	templateId	1..1	SHALL		CONF:226	
	@root	1..1	SHALL		CONF:227	2.16.840.1.113883.10.20.33.4.7

⁴ VAS is a measurement instrument that tries to measure a characteristic or attitude that is believed to range across a continuum of values and cannot easily be directly measured. For example, the amount of pain that a patient feels ranges across a continuum from none to an extreme amount of pain. From the patient's perspective this spectrum appears continuous- their pain does not take discrete jumps, as a categorization of none, mild, moderate and severe would suggest. It was to capture this idea of an underlying continuum that the VAS was devised [D. Gould et al. "Information Point: Visual Analog Scale (VAS)", Available at http://www.cebp.nl/vault_public/filesystem/?ID=1478 (Accessed on 17-March-2013)]

⁵ HL7 Implementation Guide for CDS Release 2.0: Questionnaire Form Definition Document, Release 1, April 2013.

	referenceRange	1..1	SHALL		CONF:228	
	@typeCode	1..1	SHALL	CD	CONF:229	REFV
	observationRange	1..1	SHALL		CONF:230	
	value	1..1	SHALL		CONF:231	
	@xsi:type	1..1	SHALL		CONF:232	GLIST_PQ
startOfScale	head	1..1	SHALL		CONF:233	
stepSize	increment	1..1	SHALL		CONF:234	
endOfScale	@denominator	1..1	SHALL		CONF:235	

Table 25: Analog Slider Response Pattern Observation Constraints Overview

1. **SHALL** conform to the [Numeric Response Pattern Observation](#) template (CONF:224) such that it
 - a. **SHALL** contain exactly one [1..1] @root="2.16.840.1.113883.10.20.33.4.4" (CONF:224A).
2. **SHALL NOT** contain [Response Reference Range Pattern](#) template (templateId 2.16.840.1.113883.10.20.33.4.3) (CONF:225).
3. **SHALL** contain exactly one [1..1] templateId (CONF:226) such that it
 - a. **SHALL** contain exactly one [1..1] @root="2.16.840.1.113883.10.20.33.4.7" (CONF:227).
4. **SHALL** contain exactly one [1..1] referenceRange (CONF:228).
 - a. **SHALL** contain exactly one [1..1] @typeCode="REFV" (CodeSystem: HL7ActRelationshipType 2.16.840.1.113883.5.1002) (CONF:229).
 - b. **SHALL** contain exactly one [1..1] observationRange (CONF:230).
 - c. **SHALL** contain exactly one [1..1] value (CONF:231) such that it
 - i. **SHALL** contain exactly one [1..1] @xsi:type="GLIST_PQ" (CONF:232).
 1. **SHALL** contain exactly one [1..1] head (CONF:233).
 2. **SHALL** contain exactly one [1..1] increment (CONF:234).
 3. **SHALL** contain exactly one [1..1] @denominator (CONF:235).

```

<observation
  classCode="OBS"
  moodCode="EVN">
  <!--templateID for the Numeric Question Pattern Observation-->
  <templateId
    root="2.16.840.1.113883.10.20.32.4.6"/>
  <!--templateID for the Analog Slider Response Pattern-->
  <templateId
    root="2.16.840.1.113883.10.20.32.4.9"/>
  <id
    extension="fc605512-baa5-49fc-924c-cc2af5623309"
    root="1.2.208.184"/>
  <code
    code="q17-2346"
    codeSystem="1.2.208.184"
    codeSystemName="Some Table"
    displayName="Periode med smerte">
    <originalText>Hvor stor en del af døgnet har du smerter? Angiv det i %</originalText>
  </code>
  <value
    unit="%"
    value="50"
    xsi:type="PQ"/>
  <referenceRange
    typeCode="REFV">
    <observationRange>
      <value
        denominator="100"
        xsi:type="GLIST_PQ">
        <head
          value="0"/>
        <increment
          value="1"/>
        </value>
      </observationRange>
    </referenceRange>
  </observation>

```

Figure 21: Analog Slider Response Pattern Observation Example

5.8 Discrete Slider Response Pattern Observation

[observation: templateId 2.16.840.1.113883.10.20.33.4.8]

The Discrete Slider Response Pattern Observation is used to hold the response from a discrete slider question. This is similar to Multiple Choice Response Pattern Observation however the user can only select one option, hence the high value in the Question Options Pattern Observation is fixed to "1".

Used By:	Contains Entries:
Response Organizer (required)	Multiple Choice Response Pattern Observation

Table 26: Discrete Slider Response Pattern Contexts

Name	XPath	Card	Verb	Data Type	CONF#	Fixed Value
	observation[templateId/@root = '2.16.840.1.113883.10.20.33.4.8']					
	templateId	1..1	SHALL		CONF:236	
	@root	1..1	SHALL		CONF:236A	2.16.840.1.113883.10.20.33.4.5
	templateId	1..1	SHALL		CONF:237	
	@root	1..1	SHALL		CONF:238	2.16.840.1.113883.10.20.33.4.8
response	value	1..1	SHALL		CONF:239	
	entryRelationship/observation/value/high/@value	1..1	SHALL	INT	CONF:240	1

Table 27: Discrete Slider Response Pattern Observation Constraints Overview

- SHALL** confirm to [Multiple Choice Response Pattern Observation](#) template (CONF:236) such that it
 - SHALL** contain exactly one [1..1] @root="2.16.840.1.113883.10.20.33.4.5" (CONF:236A).
- SHALL** contain exactly one [1..1] templateId (CONF:237) such that it
 - SHALL** contain exactly one [1..1] @root="2.16.840.1.113883.10.20.33.4.8" (CONF:238).
- SHALL** contain exactly one [1..1] value (CONF:239)
- The value of entryRelationship/observation/value/high/@value **SHALL** be set to "1" in the [Question Options Pattern Observation](#) template (templateId 2.16.840.1.113883.10.20.32.4.20) (CONF:240).

```
<observation
  classCode="OBS"
  moodCode="EVN">
  <!--templateID for the Multiple Choise Response Pattern-->
  <templateId
    root="2.16.840.1.113883.10.20.33.4.5"/>
  <!--templateID for the Discrete Slider Response Pattern-->
  <templateId
    root="2.16.840.1.113883.10.20.33.4.8"/>
  <id
    extension="0427c096-190e-4b0d-9b82-221e76c592d7"
    root="1.2.208.184"/>
  <code
    code="q19-78A"
    codeSystem="1.2.208.N.N.N"
    codeSystemName="Some Table"
    displayName="Sideeffekter af medicin">
  <originalText>Hvordan vurderer du sideeffekterne af din medicin?</originalText>
  </code>
  <value
    code="A19-78.4"
    codeSystem="1.2.208.N.N.N"
    codeSystemName=" Some Table "
    displayName="Betydelige"
    xsi:type="CE"/>
  <entryRelationship
    contextConductionInd="true"
    typeCode="SUBJ">
  <observation
    classCode="OBS"
    moodCode="EVN">
    <!--templateID for the Question Options Pattern Observation-->
    <templateId
      root="2.16.840.1.113883.10.20.32.4.20"/>
```

```

<code
  code="74467-2"
  codeSystem="2.16.840.1.113883.6.1"
  codeSystemName="LOINC"/>
<value
  xsi:type="IVL_INT">
  <!--minimum options-->
  <low
    value="0"/>
  <!--maximum options shall always be 1 in case of discrete slider-->
  <high
    value="1"/>
  </value>
</observation>
</entryRelationship>
</observation>

```

Figure 22: Discrete Slider Response Pattern Observation Example

5.9 External References

This paragraph outlines how to handle references to external documents in the Danish XDS infrastructure using Document Sharing Service (DDS) as well as how to handle references to specific observations in external documents.

Although the reference element may be repeated indefinitely each reference element can only contain one externalDocument or one externalObservation, not both.

A document describing external references in CDA documents was made during the MaTis project and is available on MedCom SVN:

<http://svn.medcom.dk/svn/drafts/Standarder/HL7/CDA-XREF/>

The rest of this paragraph describes which elements, templateId's, codes etc. to use when referencing is necessary.

5.9.1 External Document

/ClinicalDocument/component/structuredBody/component/section/entry/organizer/component/observation/reference/externalDocument

Name	XPath	Card	Verb	Data Type	CONF#	Fixed Value
	reference	0..*	MAY	CD		
	@typeCode	1..1	SHALL		CONF-DK:13	REFR
	templateId	1..1	SHALL	II	CONF-DK:14	
	@root	1..1	SHALL			1.2.208.184.6.1
	externalDocument	1..1	SHALL	CD	CONF-DK:15	
	@classCode	1..1	SHALL			DOC
Document Id	Id	1..1	SHALL	II	CONF-DK:16	
	@root	1..1	SHALL			
	@extension	1..1	SHALL			
XDS Reference Type	Id	1..1	SHALL	II	CONF-DK:17	
	@root	1..1	SHALL			1.2.208.184.5
	@extension	1..1	SHALL			
Document Type	code	1..1	SHALL	CE	CONF-DK:18	
	@code	1..1	SHALL			
	@codeSystem	1..1	SHALL			2.16.840.1.113883.6.1
	@displayName	1..1	SHALL			

Table 28: External Document Pattern Overview

1. **MAY** contain [0..*] reference elements such that it:
 - a. **SHALL** contain exactly one [1..1] @TypeCode="REFR" (CONF-DK:13).
2. **SHALL** contain exactly one [1..1] templateId (CONF-DK:14) such that it
 - a. **SHALL** contain exactly one [1..1] @root="1.2.208.184.6.1".
3. **SHALL** contain exactly one [1..1] externalDocument (CONF-DK:15) such that it
 - a. **SHALL** contain exactly one [1..1] @classCode="DOC".

4. **SHALL** contain exactly one [1..1] `document id` (CONF-DK:16) that uniquely identifies the external document by
 - a. Exactly one [1..1] `@root` and
 - b. Exactly one [1..1] `@extension` (UUID)
5. **SHALL** contain exactly one [1..1] XDS Reference Type `id` (CONF-DK:17) that
 - a. **SHALL** contain exactly one [1..1] `@root="1.2.208.184.5"` and
 - b. **SHALL** contain exactly one [1..1] `@extension` from [Valid XDS Reference Types](#) in [Appendix A: Value sets](#)
6. **SHALL** contain exactly one [1..1] Document Type `code` (CONF-DK:18) that identifies the type of the external document using The LOINC codeSystem i.e. `code`:
 - a. **SHALL** contain exactly one [1..1] `@code` from [Valid Document Type Codes](#) in [Appendix A: Value sets](#)
 - b. **SHALL** contain exactly one [1..1] `@codeSystem="2.16.840.1.113883.6.1"`
 - c. **SHALL** contain exactly one [1..1] `@displayName` corresponding to the `@code`.

5.9.2 External Observation

/ClinicalDocument/component/structuredBody/component/section/entry/organizer/component/observation/reference/externalObservation

Name	XPath	Card	Verb	DataType	CONF#	Fixed Value
	<code>reference</code>	0..*	MAY	CD		
	<code>@typeCode</code>	1..1	SHALL		CONF-DK:13	REFR
	<code>templateId</code>	1..1	SHALL	II	CONF-DK:14	
	<code>@root</code>	1..1	SHALL			1.2.208.184.6.1
	<code>externalObservation</code>	1..1	SHALL	CD	CONF-DK:19	
	<code>@classCode</code>	1..1	SHALL			OBS
Document Id	<code>id</code>	1..1	SHALL	II	CONF-DK:16	
	<code>@root</code>	1..1	SHALL			
	<code>@extension</code>	1..1	SHALL			
XDS Reference Type	<code>id</code>	1..1	SHALL	II	CONF-DK:17	
	<code>@root</code>	1..1	SHALL			1.2.208.184.5
	<code>@extension</code>	1..1	SHALL			
Observation Id	<code>id</code>	1..1	SHALL	II	CONF-DK:20	
	<code>@root</code>	1..1	SHALL			
	<code>@extension</code>	1..1	SHALL			
Document Type	<code>Code</code>	1..1	SHALL	CE	CONF-DK:18	
	<code>@code</code>	1..1	SHALL			
	<code>@codeSystem</code>	1..1	SHALL			2.16.840.1.113883.6.1
	<code>@displayName</code>	1..1	SHALL			

Table 29: External Observation Pattern Overview

1. **MAY** contain [0..*] `reference` elements such that it:
 - a. **SHALL** contain exactly one [1..1] `@TypeCode="REFR"` (CONF-DK:13).
2. **SHALL** contain exactly one [1..1] `templateId` (CONF-DK:14) such that it
 - a. **SHALL** contain exactly one [1..1] `@root="1.2.208.184.6.1"`.
3. **SHALL** contain exactly one [1..1] `externalObservation` (CONF-DK:19) such that it
 - a. **SHALL** contain exactly one [1..1] `@classCode="OBS"`.
4. **SHALL** contain exactly one [1..1] `document id` (CONF-DK:16) that uniquely identifies the external document by
 - a. Exactly one [1..1] `@root` and
 - b. Exactly one [1..1] `@extension` (UUID)
5. **SHALL** contain exactly one [1..1] XDS Reference Type `id` (CONF-DK:17) that
 - a. **SHALL** contain exactly one [1..1] `@root="1.2.208.184.5"` and
 - b. **SHALL** contain exactly one [1..1] `@extension` from [Valid XDS Reference Types](#) in [Appendix A: Value sets](#)
6. **SHALL** contain exactly one [1..1] `Observation id` (CONF-DK:20) that uniquely identifies the external observation by
 - a. Exactly one [1..1] `@root` and

- b. Exactly one [1..1] @extension (UUID)
- 7. **SHALL** contain exactly one [1..1] Document Type code (CONF-DK:18) that identifies the type of the external document using The LOINC codeSystem i.e. code:
 - a. **SHALL** contain exactly one [1..1] @code from [Valid Document Type Codes](#) in [Appendix A: Value sets](#)
 - b. **SHALL** contain exactly one [1..1] @codeSystem= "2.16.840.1.113883.6.1"
 - c. **SHALL** contain exactly one [1..1] @displayName corresponding to the @code.

6 APPENDIX A: VALUE SETS

6.1 Valid XDS Reference Types

Root	Extension	Type
1.2.208.184.5	1	Unique DDS XDS reference
1.2.208.184.5	2	Link-resolver reference
1.2.208.184.5	3	URL reference

6.2 Valid Document Type Codes

Code	CodeSystem	DisplayName	CodeSystemName
53576-5	2.16.840.1.113883.6.1	Personal Health Monitoring Report	LOINC
74468-0	2.16.840.1.113883.6.1	Questionnaire Form Definition Document	LOINC
74465-6	2.16.840.1.113883.6.1	Questionnaire Response Document	LOINC

7 APPENDIX B: TEMPLATE IDS USED IN QRD

Templateld	Description
1.2.208.184.13.1	QRD-DK document header (root OID)
1.2.208.184.13.1.1.1	QRD-DK document level templateld
2.16.840.1.113883.10.20.32.2.1 (Open)	Information only section templateld
2.16.840.1.113883.10.20.32.2.2	Copy Right section templateld
2.16.840.1.113883.10.20.32.4.20	Question Options Pattern Observation
2.16.840.1.113883.10.20.32.4.21	Copy Right observation templateld
2.16.840.1.113883.10.20.32.4.19	Question help text observation templateld
2.16.840.1.113883.10.20.33.2.1	QRD Section level templateld
2.16.840.1.113883.10.20.33.4.1	Response organizer level templateld
2.16.840.1.113883.10.20.33.4.2	Response media templateld
2.16.840.1.113883.10.20.33.4.3	Response reference range templateld
2.16.840.1.113883.10.20.33.4.4	Numeric response observation templateld
2.16.840.1.113883.10.20.33.4.5	Multiple choice response observation templateld
2.16.840.1.113883.10.20.33.4.6	Text response observation templateld
2.16.840.1.113883.10.20.33.4.7	Analog slider response observation templateld
2.16.840.1.113883.10.20.33.4.8	Discrete slider response observation templateld

Table 30: Template ids used in QRD